

Features

- 0 - 50 psid pressure range
- Field replaceable pressure sensors
- 20kHz scan rate
- Duplex 64 pressure inputs with 32 pressure sensors
- On board sensor excitation regulator



ZOC22B/32Px Patented
Pressure Scanner (shown)

General Description

The Model ZOC22B electronic pressure scanning module is an extremely compact, multi-pressure scanner which accepts up to 64 pneumatic inputs and converts them to computer compatible electronic signals. Each ZOC22B module incorporates 32 individual silicon pressure sensors, calibration valving, a high speed multiplexer (20kHz), and an instrumentation amplifier.

An integral "duplexing" valve is available to allow the ZOC22B's 32 sensors to service up to 64 input pressures. The integral calibration valve has four modes of operation: operate, calibrate, purge, and leak test; each activated by applying the appropriate pneumatic control pressure. Each group of 16 pressure sensors contains its own calibration valving which allows the ZOC22B module to incorporate dual pressure ranges. This calibration valve allows the ZOC sensors to be automatically calibrated on-line. The ZOC22B's extremely compact design (approx. 0.08 cu. in. per channel) permits installation within the very confined spaces typically available in wind tunnel models.

Three versions are available:

ZOC22B/32Px - 32 Px inputs each with its own dedicated sensors

ZOC22B/32PxX2 - 64 Px inputs duplexed* between 32 sensors.

ZOC22B/32Px Valveless (No Calibration Valve)

Applications

The ZOC22B electronic pressure scanning module is specifically designed for use in wind tunnel tests and flight tests where operational conditions are very space-constrained and pressures do not exceed 50 psi. It is ideal for use inside small supersonic wind tunnel models.

The ZOC22B may be mounted in any position so the units may be close coupled to the pressure sources to be measured. When the ZOC22B is used for flight test, it must be installed in a thermostatically controlled heater jacket.

The ZOC22B module is designed to be used in conjunction with our Model ERAD4000 Remote A/D or our Model DSM3400 Digital Service Module. Each ZOC22B pressure scanner incorporates an embedded RTD to monitor the temperature of the pressure sensors. Optional temperature calibration data is available on disk. The ERAD4000 communicates via Ethernet. The DSM4400 communicates via Ethernet, RS-232, or ARINC 429.

*Duplexing shares 2Px inputs with one pressure sensor. This doubles the usefulness of a ZOC22B module without increasing the cost or the space needed for module installation.

Px = Pressure Input

Specifications

Inputs (Px): 64 or 32 .042 inch (1.067mm) O.D. tubulations

Full Scale Ranges: $\pm 10, \pm 20$ inch H₂O, $\pm 1, \pm 2.5, \pm 5, \pm 15, 50$ psid (2.5, 5, 7, 17, 35, 100, 350 kPa)

Accuracy:1

10 to 20 in.H ₂ O	$\pm 0.15\%$ F.S.
1 psid	$\pm 0.12\%$ F.S.
2.5 psid	$\pm 0.10\%$ F.S.
5 to 50 psid	$\pm 0.08\%$ F.S.

Sensor Addressing: 5 bit binary, CMOS level

Full Scale Output: Standard: ± 2.5 Vdc
Optional: ± 5 Vdc, ± 10 Vdc

Resolution: Infinite

Scan Rate: 20kHz

Operating Temperature: 0° to 60°C

Temperature Sensitivity:

Range	Zero	Span
10 inch H ₂ O	0.25% FS/°C	0.10% FS/°C
20 inch H ₂ O	0.20% FS/°C	0.08% FS/°C
1 to 50 psid	0.10% FS/°C	0.05% FS/°C

Connector Type: Cannon 15 pin MDM 15SL2P

Power Requirements: ± 15 Vdc @ 45mA

Control Pressure Requirements: 65 psi instrument grade air

Overpressure Capability:

(With no damage) 10 inch H₂O, 20 inch H₂O, 1 psid = 10 psi (70kPa)
2.5-50 psid = 400% or 75 psi (517kPa) (whichever is less)

Maximum Reference Pressure:

50 psig (345kPa)


Media Compatibility:

Gases compatible with silicon, silicone, aluminum, and Buna-N

Weight:

ZOC22B/32Px or ZOC22B/32PxX2: 3ozs (80 gm)

Ordering Information

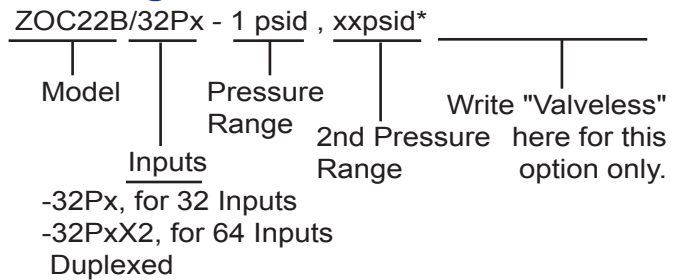


* Only list if 2nd 16 channel pressure range is different than the 1st 16 channel pressure range.

¹ Note: Accuracies are following a calibration with Scanivalve DSM or RAD data systems.

† 10 inch H₂O = 25.4 cm H₂O = .36127 psi

‡ 20 inch H₂O = 50.8 cm H₂O = .72254 psi

Dimensions Inches (mm)

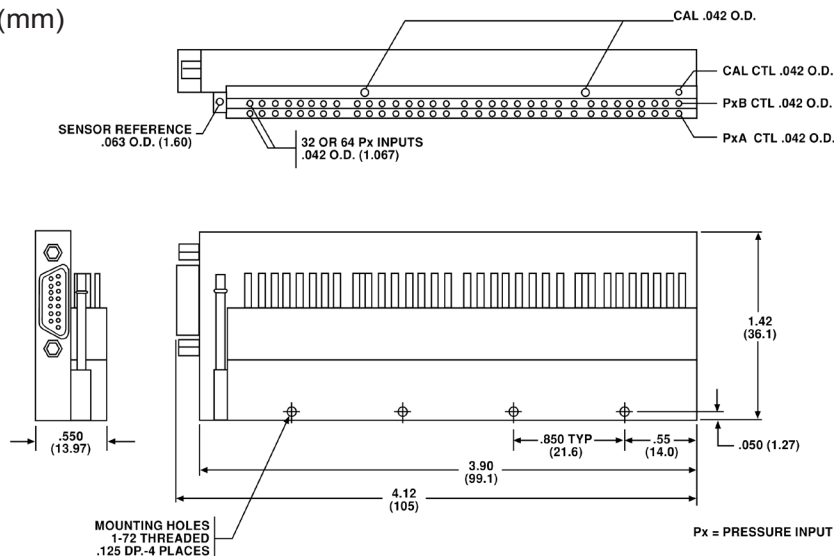

Scanivalve Headquarters

1722 N. Madson Street
Liberty Lake, WA 99019
Tel: 509-891-9970
800-935-5151
Fax: 509-891-9481
e-mail: scanco@scanivalve.com

Scanivalve
www.scanivalve.com