



Chroma's 63600 Series DC Electronic Loads are designed for testing multi-output AC/DC power supplies, DC/DC converters, chargers, batteries, adapters, and power electronic components. They are excellent for research, development, production, and incoming inspection applications.

KEY FEATURES

- Max. Power : 100W x 2(Dual), 300W & 400W
- Voltage Range : up to 600V
- 5 module mainframe Max. 2000W, load modules up to 400W/ea
- Up to 10 channels in one mainframe, fit for testing multiple output SMPS
- 0.4V @ 80A (Typical) low voltage operating characteristics
- Flexible CC, CR, CV and CP operation modes
- CZ mode for turn on capacitive load simulation
- Parallel mode for high current and power application up to 2kW
- Multi Channel synchronous control
- Auto frequency sweep up to 50kHz
- Real time power supply load transient response simulation and Vpk+/- measurement
- User programmable 100 sequential front panel input status for user-friendly operating
- Precision voltage and current measurement
- Precision high speed digitizing measurement/ data capture
- Voltage, Current and Pmax measurement for OCP/OLP testing
- Timing measurement for batteries
- Short circuit simulation
- Self-test at power-on
- Full Protection : OC, OP, OT protection and OV alarm
- Ethernet, USB and GPIB interfaces

The 63600's state of the art design uses DSP technology to simulate non-linear loads using an unique CZ operation mode allowing realistic loading behavior.


The 63600 series can draw its rated current under very low voltage (0.4V typical). This unique feature guarantees the best loading performance for modern Point-of-Load conditions and fuel cells.

The 63600 series can simulate a wide range of dynamic loading applications, with programmable load levels, slew rates, duration, and conducting voltage. The 63600 also has a dynamic sweep function to meet the test requirements of ATX power supplies. The instrument allows up to 100 sets of system operating status which can be stored in the EEPROM and recalled instantly for automated testing application.

Real time measurement of voltage and current are integrated into each 63600 load module using a 16-bit measurement circuit with three current ranges. The user can perform online voltage measurements and adjustments or simulate short circuit test using the simple keypad on the front panel.


With the VFD display and rotary knob, the 63600 loads offer versatile front panel operation. Users are able to control the 63600 family remotely via Ethernet, USB, or GPIB interface.

Also included in the 63600 are self-diagnostic routines and full protections against OP, OC, OT and alarm indicating OV, reverse polarity. This ensures the quality and reliability of the 63600 and provides protection of units under test.

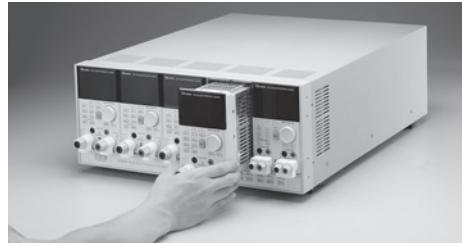

ORDERING INFORMATION

- 63600-1 :** 63600 Mainframe for Single Module
- 63600-2 :** 63600 Mainframe for 2 Modules
- 63600-5 :** 63600 Mainframe for 5 Modules
- 63610-80-20 :** DC Load Module
80V/ 20A/ 100Wx2
- 63630-80-60 :** DC Load Module
80V/ 60A/ 300W
- 63630-600-15 :** DC Load Module
600V/ 15A/ 300W
- 63640-80-80 :** DC Load Module
80V/ 80A/ 400W
- A636000 :** GPIB Interface
for 63600-2/63600-5 Mainframe
- A636001 :** Ethernet Interface
for 63600-2/63600-5 Mainframe
- A636003 :** External Signal Board (Test Pin)
for 63600-2/63600-5 Mainframe
- A636005 :** External Signal Board (BNC)
for 63600-2/63600-5 Mainframe
- A636007 :** Rack Mounting Kit
for 63600-2 mainframe
- A636008 :** Rack Mounting Kit
for 63600-5 mainframe (for Europe only)
- A632006 :** NI USB-6211 BUS-Powered Multifunction DAQ

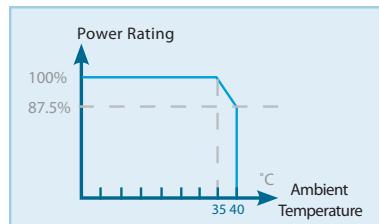

Model	63600-1*	63600-2	63600-5
Number of slots	1 slot	2 slots	5 slots
Operating temperature	0~40°C	0~40°C	0~40°C
Input Rating	1Ø 100~115V±10% V _{LN} , 1Ø 190~230V±10% V _{LN} , Switchable, 47~63Hz	1Ø 100~115V±10% V _{LN} , 1Ø 190~230V±10% V _{LN} , Switchable, 47~63Hz	1Ø 100~115V±10% V _{LN} , 1Ø 190~230V±10% V _{LN} , Auto Range, 47~63Hz
Mainframe dimension (HxWxD)	177x70.22x554.9mm / 7x2.76x21.8 inch	177x210x554mm / 7.0x8.27x21.8 inch	177x447x554mm / 7.0x17.6x21.8 inch (Full Rack)
Weight	7.5kg / 16.53lbs	11.5kg / 23.35lbs	15.6kg / 34.39lbs

* None digital interface option

SPECIFICATIONS-1

Model	63610-80-20			63630-80-60					
Configuration	100Wx2			300W					
Voltage *1 *8	0~80V			0~80V					
Current	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A			
Power *2	0~16W	0~30W	0~100W	0~30W	0~60W	0~300W			
Static Mode									
Typical Min. Operating Voltage (DC)	0.5V@0.2A	0.5V@2A	0.5V@20A	0.5V@0.6A	0.5V@6A	0.5V@60A			
Constant Current Mode									
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A			
Resolution	0.01mA	0.1mA	1mA	0.01mA	0.1mA	1mA			
Accuracy	0.1%+0.1%F.S.			0.1%+0.1%F.S.					
Constant Resistance Mode									
Range	CRL : 0.04~80 Ω (100W/6V) CRM: 1.44~2.9k Ω (100W/16V) CRH : 5.76~12k Ω (100W/80V)			CRL : 0.015~30 Ω (300W/6V) CRM: 0.3~600 Ω (300W/16V) CRH : 1.5~3k Ω (300W/80V)					
Resolution *9	0.3288mS			0.9864mS					
Accuracy *3	0.1%+0.075S (6V) 0.1%+0.01S (16V) 0.1%+0.00375S (80V)			0.1%+0.2S (6V) 0.1%+0.03S (16V) 0.1%+0.01S (80V)					
Constant Voltage Mode									
Range	0~6V	0~16V	0~80V	0~6V	0~16V	0~80V			
Resolution	0.1mV	1mV	1mV	0.1mV	1mV	1mV			
Accuracy	0.05%+0.1%F.S.			0.05%+0.1%F.S.					
Constant Power Mode									
Range	0~2W	0~10W	0~100W	0~6W	0~30W	0~300W			
Resolution *9	1mW	10mW	100mW	3.2mW	32mW	320mW			
Accuracy *4	0.3%+0.3%F.S.			0.3%+0.3%F.S.					
Dynamic Mode - CC									
Min. Operating Voltage	1.5V			1.5V					
Frequency	100Hz~50kHz/0.01Hz~1kHz			100Hz~50kHz/0.01Hz~1kHz					
Duty	1~99% (Min. Rise Time Dominated)			1~99% (Min. Rise Time Dominated)					
Accuracy	1μs/1ms+100ppm			1μs/1ms+100ppm					
Slew Rate	0.04A/ms~0.02A/μs	0.4A/ms~0.2A/μs	4A/ms~2A/μs	0.12A/ms~0.06A/μs	1.2A/ms~0.6A/μs	12A/ms~6A/μs			
Resolution	0.01mA/μs	0.1mA/μs	1mA/μs	0.01mA/μs	0.1mA/μs	1mA/μs			
Accuracy	10% ± 20μs			10% ± 20μs					
Min. Rise Time	10 μs			10 μs					
Current									
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A			
Resolution	0.01mA	0.1mA	1mA	0.01mA	0.1mA	1mA			
Ext Wave Mode(20kHz) : CC									
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A			
Level	0~10V			0~10V					
Accuracy	0.5%F.S.			0.5%F.S.					
Program mode									
Sequence No.	100/Program			100/Program					
Dwell / SEQ	0.1ms ~ 30s (Resolution : 0.1ms)			0.1ms ~ 30s (Resolution : 0.1ms)					
Load Setting	Refer to Static mode specifications			Refer to Static mode specifications					
Spec Check	Voltage/Current/Power			Voltage/Current/Power					
Measurement									
Voltage Read Back									
Range	0~6V	0~16V	0~80V	0~6V	0~16V	0~80V			
Resolution	0.1069mV	0.2849mV	1.3537mV	0.1069mV	0.2849mV	1.3537mV			
Accuracy *5	0.025%+0.01%F.S.			0.01%+	0.025%F.S.				
Current Read Back									
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A			
Resolution	0.003349mA	0.034628mA	0.329561mA	0.009942mA	0.101748mA	1.009878mA			
Accuracy *5	0.05%+0.05%F.S.			0.05%+0.05%F.S.					



All specifications are subject to change without notice.

• Continued on next page →

Power Read Back										
Range	0~16W	0~30W	0~100W	0~30W	0~60W	0~300W				
Accuracy *5	0.1%+0.1%F.S.				0.1%+0.1%F.S.					
Voltage Monitor										
Bandwidth	20 kHz		20 kHz		20 kHz					
Range	0~6V	0~16V	0~80V	0~6V	0~16V	0~80V				
Output	0~10V		0~10V		0~10V					
Accuracy	0.5%F.S.		0.5%F.S.		0.5%F.S.					
Current Monitor										
Bandwidth	20 kHz		20 kHz		20 kHz					
Range	0~0.2A	0~2A	0~20A	0~0.1A	0~1A	0~10A				
Output	0~10V		0~10V		0~10V					
Accuracy	0.5%F.S.		0.5%F.S.		0.5%F.S.					
Protection										
Over Power	Yes		Yes		Yes					
Over Current	Yes		Yes		Yes					
Over Voltage Alarm*8	Yes		Yes		Yes					
Over Temperature	Yes		Yes		Yes					
Reverse	Yes		Yes		Yes					
Interface										
USB	Standard		Standard		Standard					
Ethernet	Optional		Optional		Optional					
GPIB	Optional		Optional		Optional					
System BUS	Master/Slave		Master/Slave		Master/Slave					
Others										
Dout										
No. of bits	2 bits per mainframe		2 bits per mainframe		2 bits per mainframe					
Level - H	1.8V/3.3V/5V switchable		1.8V/3.3V/5V switchable		1.8V/3.3V/5V switchable					
Level - L	<0.6V@Isink=10mA		<0.6V@Isink=10mA		<0.6V@Isink=10mA					
Drive	Pull_up resistor = 4.7kΩ		Pull_up resistor = 4.7kΩ		Pull_up resistor = 4.7kΩ					
Din (TTL Compatible, Rising Edge)										
No. of bits	2 bits per mainframe		2 bits per mainframe		2 bits per mainframe					
External Trig. for Digitizing										
No. of bits	1 bit per mainframe		1 bit per mainframe		1 bit per mainframe					
External Trig. for Auto Sequences (TTL Compatible, Rising Edge)										
No. of bits	1 bit per mainframe		1 bit per mainframe		1 bit per mainframe					
Load ON - O/P										
Level	TTL Compatible, Level, Active High		TTL Compatible, Level, Active High		TTL Compatible, Level, Active High					
Short ON - O/P										
No. of channels	2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 10 channels per 63600-5 mainframe		2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 10 channels per 63600-5 mainframe		2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 10 channels per 63600-5 mainframe					
Level	TTL Compatible, Level, Active High		TTL Compatible, Level, Active High		TTL Compatible, Level, Active High					
General										
Short circuit										
Current *6	Set to 100% of rated current		Set to 100% of rated current		Set to 100% of rated current					
Input Resistance (Load Off)	700kΩ (Typical)		700kΩ (Typical)		700kΩ (Typical)					
Dimensions (HxWxD)	142x86x514mm / 5.6x3.4x20.2 inch		142x86x514mm / 5.6x3.4x20.2 inch		142x86x514mm / 5.6x3.4x20.2 inch					
Weight	5kg / 11 lbs		4kg / 8.8 lbs		4kg / 8.8 lbs					
Operating Temperature	0~40°C		0~40°C		0~40°C					
Storage Temperature	-20~80°C		-20~80°C		-20~80°C					
Power	Supply from mainframe		Supply from mainframe		Supply from mainframe					
EMC & Safety	CE		CE		CE					



SPECIFICATIONS-2

Model	63630-600-15			63640-80-80					
Configuration	300W			400W					
Voltage *1 *8	0~600V			0~80V					
Current	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A			
Power *2	0~90W	0~300W	0~300W	0~60W	0~60W	0~400W			
Static Mode									
Typical Min. Operating Voltage (DC)	2V@0.15A	2V@1.5A	2V@15A	0.4V@0.8A	0.4V@8A	0.4V@80A			
Constant Current Mode									
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A			
Resolution	0.005mA	0.05mA	0.5mA	0.01mA	0.1mA	1mA			
Accuracy	0.1%+0.1%F.S.			0.1%+0.1%F.S.					
Constant Resistance Mode									
Range	CRL : 0.133~270 Ω (300W/80V) CRM: 1.92~4k Ω (300W/150V) CRH: 208~200k Ω (300W/600V)			CRL : 0.01~20 Ω (400W/6V) CRM: 0.36~720 Ω (400W/16V) CRH : 1.45~2.9k Ω (400W/80V)					
Resolution *9	0.2435mS			1.322mS					
Accuracy *3	0.1%+0.02S (80V) 0.1%+0.0005S (150V) 0.1%+0.0003S (600V)			0.1%+0.275S (6V) 0.1%+0.036S (16V) 0.1%+0.01375S (80V)					
Constant Voltage Mode									
Range	0~80V	0~150V	0~600V	0~6V	0~16V	0~80V			
Resolution	1mV	10mV	10mV	0.1mV	1mV	1mV			
Accuracy	0.05%+0.1%F.S.			0.05%+0.1%F.S.					
Constant Power Mode									
Range	0~6W	0~30W	0~300W	0~8W	0~40W	0~400W			
Resolution *9	5.625mW	56.25mW	562.5mW	4mW	40mW	400mW			
Accuracy *4	0.3%+0.3%F.S.			0.3%+0.3%F.S.					
Dynamic Mode - CC									
Min. Operating Voltage	3V			1.5V					
Frequency	100Hz~50kHz/0.01Hz~1kHz			100Hz~50kHz/0.01Hz~1kHz					
Duty	1~99% (Min. Rise Time Dominated)			1~99% (Min. Rise Time Dominated)					
Accuracy	1μs/1ms+100ppm			1μs/1ms+100ppm					
Slew rate	0.03A/ms~0.015A/μs	0.3A/ms~0.15A/μs	3A/ms~1.5A/μs	0.16A/ms~0.08A/μs	1.6A/ms~0.8A/μs	16A/ms~8A/μs			
Resolution	0.005mA/μs	0.05mA/μs	0.5mA/μs	0.01mA/μs	0.1mA/μs	1mA/μs			
Accuracy	10% ± 20μs			10% ± 20μs					
Min. Rise Time	10 μs			10 μs					
Current									
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A			
Resolution	0.005mA	0.05mA	0.5mA	0.01mA	0.1mA	1mA			
Ext Wave Mode(20kHz) : CC									
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A			
Level	0~10V			0~10V					
Accuracy	0.5%F.S.			0.5%F.S.					
Program mode									
Sequence No.	100/Program			100/Program					
Dwell / SEQ	0.1ms ~ 30s (Resolution : 0.1ms)			0.1ms ~ 30s (Resolution : 0.1ms)					
Load Setting	Refer to Static mode specifications			Refer to Static mode specifications					
Spec Check	Voltage/Current/Power			Voltage/Current/Power					
Measurement									
Voltage Read Back									
Range	0~80V	0~150V	0~600V	0~6V	0~16V	0~80V			
Resolution	1.4194mV	2.661mV	10.645mV	0.1069mV	0.2849mV	1.3537mV			
Accuracy *5	0.025%+0.01%F.S.			0.01%+ 0.025%F.S.					
0.025%+0.01%F.S.	0.025%+0.01%F.S.			0.01%+ 0.025%F.S.					
Current Read Back									
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A			
Resolution	0.00275mA	0.0266mA	0.255mA	0.013695mA	0.138766mA	1.31406mA			
Accuracy *5	0.05%+0.05%F.S.			0.05%+0.05%F.S.					



All specifications are subject to change without notice.

• Continued on next page →

Power Read Back									
Range	0~90W	0~300W	0~300W	0~60W	0~60W	0~400W			
Accuracy *5		0.1%+0.1%F.S.			0.1%+0.1%F.S.				
Voltage Monitor									
Bandwidth	20 kHz			20 kHz					
Range	0~80V	0~150V	0~600V	0~6V	0~16V	0~80V			
Output	0~10V			0~10V					
Accuracy	0.5%F.S.			0.5%F.S.					
Current Monitor									
Bandwidth	20 kHz			20 kHz					
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A			
Output	0~10V			0~10V					
Accuracy	0.5%F.S.			0.5%F.S.					
Protection									
Over Power	Yes			Yes					
Over Current	Yes			Yes					
Over Voltage Alarm*8	Yes			Yes					
Over Temperature	Yes			Yes					
Reverse	Yes			Yes					
Interface									
USB	Standard			Standard					
Ethernet	Optional			Optional					
GPIB	Optional			Optional					
System BUS	Master/Slave			Master/Slave					
Others									
Dout									
No. of bits	2 bits per mainframe			2 bits per mainframe					
Level - H	1.8V/3.3V/5V switchable			1.8V/3.3V/5V switchable					
Level - L	<0.6V@Isink=10mA			<0.6V@Isink=10mA					
Drive	Pull_up resistor = 4.7kΩ			Pull_up resistor = 4.7kΩ					
Din (TTL Compatible, Rising Edge)									
No. of bits	2 bits per mainframe			2 bits per mainframe					
External Trig. for Digitizing									
No. of bits	1 bit per mainframe			1 bit per mainframe					
External Trig. for Auto Sequences (TTL Compatible, Rising Edge)									
No. of bits	1 bit per mainframe			1 bit per mainframe					
Load ON - O/P									
Level	TTL Compatible, Level, Active High			TTL Compatible, Level, Active High					
Short ON - O/P									
No. of channels	2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 10 channels per 63600-5 mainframe			2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 10 channels per 63600-5 mainframe					
Level	TTL Compatible, Level, Active High			TTL Compatible, Level, Active High					
General									
Short circuit									
Current *6	Set to 100% of rated current			Set to 100% of rated current					
Input Resistance (Load Off)	2MΩ (Typical)			700kΩ (Typical)					
Dimensions (HxWxD)	142x86x514mm / 5.6x3.4x20.2 inch			142x86x514mm / 5.6x3.4x20.2 inch					
Weight	5kg / 11 lbs			4.5kg / 9.9 lbs					
Operating Temperature	0~40°C			0~40°C					
Storage Temperature	-20~80°C			-20~80°C					
Power	Supply from mainframe			Supply from mainframe					
EMC & Safety	CE			CE					

NOTE*1 : The maximum current loading below the minimum operating voltage (0.5V) will follow a derating curve.

NOTE*2 : The 400W power rating of the 63600-80-80 specified at an ambient temperature of 35°C, please refer to the power rating curve on the right.

NOTE*3 : Does not apply to setting current < 0.25% full scale current in high range. Does not apply to setting current < 0.05% full scale current in low and middle range.

NOTE*4 : The full scale is Vmax x Imax.

NOTE*5 : The DC level measurements are made over a period of 20ms, and does not measure any transient signals in the DC measurements.

NOTE*6 : Its limits are the maximum power and maximum current of the current range.

NOTE*7 : The 63600 is guaranteed to meet specified performance at temperature range of 25 ± 5°C.

NOTE*8 : If the operating voltage exceeds the rated voltage for 1.1 times, it would cause permanent damage to the device.

NOTE*9 : Please refer to user's manual for detail specifications, and S (siemens) is the SI unit of conductance, equal to one reciprocal ohm.