


Analog input board, optically isolated, 16 SE / 8 differential inputs, 16-bit

PCI
EXPRESS®

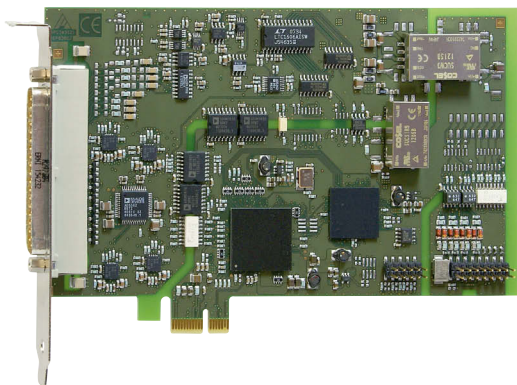

Also for **PCI**
see APCI-3001, page 202
and APCI-3010 / APCI-3016,
page 196

Also for **CompactPCI™**
see CPCI-3001, page 252



Windows
64/32-bit drivers



on request



LabVIEW™



LabWindows/CVI™

Features

Analog inputs

- 16 single-ended/8 differential inputs
- 16-bit resolution
- Optical isolation 500 V
- Throughput: 100 kHz
- Input ranges: 0-10 V, ± 10 V, 0-5 V, ± 5 V, 0-2 V, ± 2 V, 0-1 V, ± 1 V, 0-20 mA (option) freely programmable through software for each channel
- Gain PGA x1, x2, x5, x10 freely programmable through software for each channel
- PCI Express DMA for analog data acquisition
- Overvoltage protection
- Input filters: 159 kHz

Analog acquisition

- One single channel, several channels, several channels through scan list
- Automatic analog acquisition through cyclic timer control
- Acquisition through scan list: up to 16 entries with gain, channel, unipolar/bipolar
- Acquisition triggered through software, timer, external event
- Trigger functions:
Software trigger or external trigger: the analog acquisition (single or sequence) is started through signal switching from 0 V to 24 V at the digital input 0.
- Interrupt: end of single channel, end of multichannel, end of scan list

Digital

- 4 dig. inputs including 1 interruptible input
- 4 dig. outputs, 24 V, optically isolated

Timer

- 1 timer

APCIe-3021

PCI Express interface

16 single-ended/
8 differential inputs, 16-bit

Optical isolation 500 V

PCI Express DMA, programmable gain

Trigger functions

8 digital I/O, 24 V, optically isolated, timer

Safety features

- Optical isolation 500 V min.
- Creeping distance IEC 61010-1
- Overvoltage protection ± 40 V, analog inputs
- Protection against high-frequency EMI
- Input filters: 159 kHz
- Noise neutralisation of the PC supply

Applications

- Industrial process control
- Industrial measurement and monitoring
- Multichannel data acquisition
- Control of chemical processes
- Factory automation
- Acquisition of sensor data, current measurement
- Laboratory equipment, instrumentation

Software drivers

A CD-ROM with the following software and programming samples is supplied with the board.

Standard drivers for:

- Linux
- 32-bit drivers for Windows 8 / 7 / Vista / XP / 2000
- Signed 64-bit drivers for Windows 8 / 7 / XP
- Real-time use with Linux and Windows on request

Drivers and samples for the following compilers and software packages:

- .NET
- Microsoft VC++ • Borland C++
- Visual Basic • Delphi
- LabVIEW • LabWindows/CVI

ADDIPACK functions

- Analog input • Digital input
- Digital output • Watchdog • Timer

On request:

Further operating systems, compilers and samples.

Driver download: www.addi-data.com/downloads

Specifications

Analog inputs

Number of inputs:	16 single-ended / 8 differential inputs or 8 single-ended / 4 differential inputs
Resolution:	16-bit
Optical isolation:	500 V through opto-couplers from PC to peripheral
Input ranges:	0-10 V, ± 10 V, 0-5 V, ± 5 V, 0-2 V, ± 2 V, 0-1 V, ± 1 V, 0(4)-20 mA (optional) software-programmable for each channel
Throughput:	100 kHz
Gain:	Software programmable (x1, x2, x5, x10)
Relative precision (INL):	± 2 LSB max. (A/D converter)
Diff. non-linearity (DNL):	± 1 LSB max. (A/D converter)
Bandwidth (-3 dB):	Limited to 159 kHz with low-pass filter
Trigger:	Through software, timer, external event (24 V input)
Data transfer:	Data to the PC through FIFO memory, I/O commands, interrupt at EOC (End Of Conversion) and EOS (End of Scan), DMA transfer at EOC
Interrupts:	End of conversion, at timer overrun, End of scan

Digital I/O

Number of I/O channels:	4 digital inputs, 4 digital high-side outputs, 24 V
Optical isolation:	1000 V through opto-couplers
Input current at 24 V:	10 mA typ.
Input range:	0-30 V
Supply voltage:	8-32 V
Max. switching current:	65 mA typ.


EMC – Electromagnetic compatibility

The product complies with the European EMC directive. The tests were carried out by a certified EMC laboratory in accordance with the norm from the EN 61326 series (IEC 61326). The limit values as set out by the European EMC directive for an industrial environment are complied with. The respective EMC test report is available on request.

Physical and environmental conditions

Dimensions:	168 x 99 mm
System bus:	Acc. to PCI Express base specification, Revision 1.0a (PCI Express 1.0a)
Space required:	1-/4-/8-/16-lane PCI Express slot
Operating voltage:	+ 3.3 V, + 12 V from PC
Front connector:	37-pin D-Sub male connector
Temperature range:	0 to 60 °C (with forced cooling)

Simplified block diagram

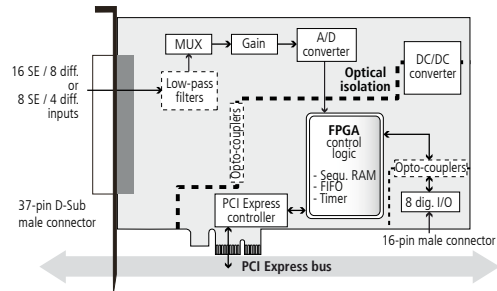

Pin assignment – 37-pin D-Sub male connector


DIFF	SE	SE	DIFF
(+) An. input 0	(+) An. input 0	(+) An. input 8	(+) An. input 4
(+) An. input 1	(+) An. input 1	(+) An. input 9	(+) An. input 5
(+) An. input 2	(+) An. input 2	(+) An. input 10	(+) An. input 6
(+) An. input 3	(+) An. input 3	(+) An. input 11	(+) An. input 7
(-) An. input 3	(+) An. input 4	(+) An. input 12	(-) An. input 7
(-) An. input 2	(+) An. input 5	(+) An. input 13	(-) An. input 6
(-) An. input 1	(+) An. input 6	(+) An. input 14	(-) An. input 5
(-) An. input 0	(+) An. input 7	(+) An. input 15	(-) An. input 4
1 { Analog input GND	(+) An. input 8	Analog input GND	1 { Analog input GND
2 { Analog input GND	(+) An. input 9	Analog input GND	
3 { Analog input GND	(+) An. input 10	Analog input GND	
4 { Analog input GND	(+) An. input 11	Analog input GND	
5 { Analog input GND	(+) An. input 12	Analog input GND	
6 { Analog input GND	(+) An. input 13	Analog input GND	
7 { Analog input GND	(+) An. input 14	Analog input GND	
8 { Analog input GND	(+) An. input 15	Analog input GND	
9 { Analog input GND	(-) An. input 7	Analog input GND	
10 { Analog input GND	(-) An. input 6	Analog input GND	
11 { Analog input GND	(-) An. input 5	Analog input GND	
12 { Analog input GND	(-) An. input 4	Analog input GND	
13 { Analog input GND		Analog input GND	
14 { Analog input GND		Analog input GND	
15 { Analog input GND		Analog input GND	
16 { Analog input GND		Analog input GND	
17 { Analog input GND		Analog input GND	
18 { Analog input GND		Analog input GND	
19 { Analog input GND		Analog input GND	

1: The analog inputs have a common ground line

Pin assignment – 16-pin male connector

Dig. input 3-	16	Dig. input 3+
Dig. input 2-	14	Dig. input 2+
Dig. input 1-	12	Dig. input 1+
Dig. input 0-	10	Dig. input 0+
24 V voltage supply	8	High-side output 3 (24 V)
24 V voltage supply	6	High-side output 2 (24 V)
GND (dig. output)	4	High-side output 1 (24 V)
GND (dig. output)	2	High-side output 0 (24 V)

ADDI-DATA connection

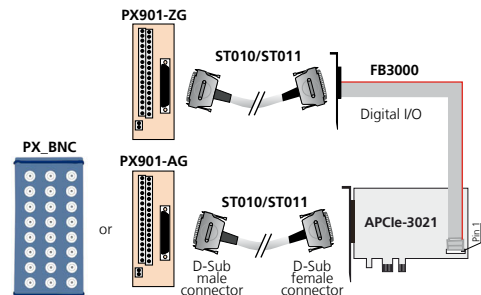

Ordering information

APCLe-3021

Analog input board, optically isolated, 16 SE/8 differential inputs, 16-bit. Incl. technical description and software drivers.

Versions

APCLe-3021-16	Version with 16 SE/8 diff. inputs
APCLe-3021-8	Version with 8 SE/4 diff. inputs
APCLe-3021-4	Version with 4 SE/2 diff. inputs

Options

Please indicate the number of channels

Option SF:	Precision filter for 1 single-ended channel
Option DF:	Precision filter for 1 diff. channel
Option PC:	Current input 0(4)-20 mA for 1 channel
PC-SE:	for single-ended
PC-Diff:	for differential

Accessories

PX901-A:	Screw terminal panel for connecting the analog I/O
PX901-AG:	Same as PX901-A with housing for DIN rail
PX_BNC:	BNC connection box for connecting the analog I/O
PX901-ZG:	Screw terminal panel for connecting the dig. I/O
ST010:	Standard round cable, shielded, twisted pairs, 2 m
ST011:	Standard round cable, shielded, twisted pairs, 5 m
FB3000:	Ribbon cable for digital I/O