

Multifunction counter board, optically isolated, fast counter inputs – programmable functions, for CompactPCI Serial

NEW*

CPCIs-1711

Available functions: incremental counter, SSI Synchronous Serial Interface, counter/timer, pulse acquisition, frequency, pulse width, period duration, velocity measurement, PWM, BiSS-Master, digital I/O, Sin/Cos, EnDat 2.2 ...


Function selection through software

Optical isolation

Inputs and outputs: RS422, TTL, 24 V

Customised functions

Extended temperature range -40 °C to +85 °C

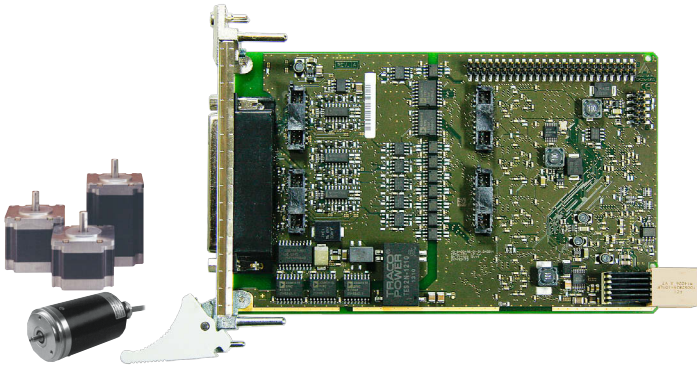

Also for **PCI EXPRESS™**
See APCI-1711, page 128

Also for **PCI**
see APCI-1710
page 166

Also for **CompactPCI™**
see CPCI-1710
page 234

The board CPCIs-1711 is a fast multifunction and multi-channel counter board for CompactPCI Serial. The strengths of this board are its wide range of applications and high precision and reliability in harsh industrial environment.

With this board you can realise many different applications on the same hardware base. The board is supplied with a pool of functions which provides the user with maximum efficiency yet minimum space and parts requirement. The functions are individually configured for each channel through the supplied software. The flexible programming facilities on this board allow many different user applications to be quickly and easily developed and reconfigured as further requirements arise. Thanks to the FPGA board structure, further counting applications can be realised through software adaptation. Contact us!

Features

- 32-bit data access
- RS422 driver 5 MHz (up to 20 MHz on request)
- With RS422/TTL input/output signals (CPCIs-1711) or 24 V input signals (CPCIs-1711-24V)
- Four onboard function modules

Functions

- Incremental counter for the acquisition of incremental encoders (90° phase-shifted signals)
- BiSS-Master (B and C mode)
- SSI Synchronous Serial Interface. The SSI function is an interface for systems which allow an absolute position information via serial data transfer.
- Counter/timer (82C54)
- Pulse acquisition
- Frequency measurement
- Pulse width modulation (PWM)
- Period duration measurement
- Velocity measurement
- Digital inputs and outputs
- Edge time measurement (ETM)
- Parallel interface
- Sin/Cos (1 V_{SS}, 11 μA_{SS})
- EnDat 2.2
- Customised functions

Available channels on one function module

- 4 channels, programmable either as digital inputs or outputs, optically isolated, RS422
- 3 channels, digital inputs, optically isolated, 24 V
- 1 digital power outputs, optically isolated, 24 V

Additional channels

- 28 TTL I/O, without optical isolation

Versions

	RS422/ TTL- I/O	24 V inputs	5 V inputs	24 V outputs	TTL I/O
CPCIs-1711	16	12	–	4	28
CPCIs-1711-24V	–	28	–	4	28
CPCIs-1711-5V-I	16		12	4	28

Safety features

- Creeping distance IEC 61010-1
- Optical isolation 1000 V
- Noise neutralisation of the PC supply

Applications

- Event counting
- Position acquisition
- Motion control
- Batch counting
- ...

Software drivers

A CD-ROM with the following software and programming samples is supplied with the board.

Standard drivers for:

- Linux
- 32-bit drivers for Windows 8 / 7 / Vista / XP / 2000
- Signed 64-bit drivers for Windows 8 / 7 / XP
- Real-time use with Linux and Windows on request

Drivers and samples for the following compilers and software packages:

- Microsoft VC++ • Borland C++ 5.01

On request:

Further operating systems, compilers and samples.

Driver download: www.addi-data.com/downloads



* Preliminary
product information

Specifications*

Free programming of the functions

- Acquisition of incremental encoders (1 x 32-bit or 2 x 16-bit)
- SSI (max. 3 encoders per module)
- Counter/Timer (3 counters similar to 82C54)
- Pulse counter (4 x 32-bit counters per module)
- Chronos (chronometer)
- TOR (pulse counter with time slices, ...)
- Digital I/O (8 I/O, 24 V, TTL, RS422)
- PWM (pulse width modulation, 2 x per module)
- BiSS-Master (B and C mode)
- ETM (Timer interface for period duration measurement, edge time, ...)
- TTL (TTL I/O without isolation)
- Parallel Interface
- EnDat 2.2
- Sin/Cos
- Customised functions

Signals

Digital I/O signals, TTL or RS422, 24 V

Inputs

Differential inputs or outputs (A, B, C, D)

Differential inputs, RS422:	16 (can be used as inputs or outputs)
Nominal voltage:	3.3 VDC
Common mode range:	+12 / -7 V
Input sensitivity:	200 mV
Input hysteresis:	50 mV
Input impedance:	12 k Ω
Terminal resistor:	120 Ω (not supplied)
Max. input frequency:	CPCIs-1711: 5 MHz (at nominal voltage) up to 20 MHz on request!

Mass-related inputs, 24 V (E, F, G):

Number of inputs:	12
Nominal voltage:	24 VDC
Logic input levels:	Unominal: 24 V UH max.: 30 V UH min.: 19 V UL max.: 14 V UL min.: 0 V

Maximal input frequency: 1 MHz (at nominal voltage) depending on the function

Outputs

Nominal voltage:	3.3 VDC
Maximum output frequency:	5 MHz (diff. outputs)
Max. number of outputs:	16 (if they are not used as diff. inputs)

Digital outputs, 24 V (H)

Output type:	High-side (load to ground)
Number of outputs:	4
Nominal voltage:	24 VDC
Supply voltage range:	4.75 V to 30 VDC (via 24 V ext. pin)
Maximum current:	90 mA per output / 270 mA total current limit (PTC)
Overtemperature:	165 °C (all outputs switch off)

Technical data CPCIs-1711-24 V version

24 V inputs (channels A to G).
This board version is intended for the
connection of 24 V encoders.
Only 24 V signals can be connected to the inputs.

Nominal voltage:	24 VDC
Max. input frequency:	1 MHz (at nominal voltage) depending on the function
Logic input levels : (Standard)	Unominal: 24 V UH max.: 30 V UH min.: 18 V UL max.: 16 V UL min.: 0 V

All functions using channels A, B, C, D as outputs cannot be used.
See the manuals of the functions!

Safety

Optical isolation: 1000 V

EMC – Electromagnetic compatibility

The product complies with the European EMC directive. The tests were carried out by a certified EMC laboratory in accordance with the norm from the EN 61326 series (IEC 61326). The limit values as set out by the European EMC directive for an industrial environment are complied with. The respective EMC test report is available on request.

PC system requirements and environmental conditions

Dimensions:	160 x 100 mm
System bus:	PCI Express according CompactPCI Serial specification PICMG CPCI-S.0 R1.0
Space required:	1 x CompactPCI Serial slot for digital I/O 1 x slot opening for TTL I/O with FB1711
Operating voltage:	+12 V, \pm 5 %
Current consumption:	230 mA, \pm 10 %
Front connector:	78-pin D-Sub female connector
Additional connector:	50-pin D-Sub male connector
Temperature range:	from -40 °C to +85 °C
MTBF	in preparation

Ordering information

CPCIs-1711

Multifunction counter board, optically isolated, fast counter inputs – programmable functionality, for CompactPCI Serial.
Incl. technical description and software drivers.

CPCIs-1711:	Multifunction counter board, optical isolated
CPCIs-1711-24V:	24 V instead of RS422 / TTL I/O (A, B, C, D)
CPCIs-1711-5V-I:	5 V inputs instead of 24 V (E, F, G)

Option

Opt. 5V: Outputs 3.3 V instead of 24 V (H0, H1, H2, H3)

Accessories

PX8001:	3-row screw terminal panel with housing for DIN rail
ST1711-50:	Standard round cable, shielded, twisted pairs, 2 m, 78-pin male connector to 50-pin male connector

For the TTL I/O function

ST370-16:	Standard round cable, shielded, twisted pairs, 2 m
FB1711:	Ribbon cable (included in delivery)

For the Sin/Cos function

EM-SINCOS-11μAPP:	Extension module, 2 x 11 μ A _{pp} inputs, 1 dig. output, 24 V
EM-SINCOS-1VPP:	Extension module, 2 x 1 V _{pp} inputs, 1 dig. output, 24 V
ST1711-50-37:	Y-cable, round, shielded, twisted pairs, 78-pin D-Sub male connector to 50-pin D-Sub male connector and 37-pin D-Sub male connector
PX901-ZG:	Screw terminal panel for DIN rail

* Preliminary product information